




- **Advantages**

- Operate at current densities above 500 A / m².
- Increased production with minimal investment.
- Improving Quality of cathodes
- Requires No External Gas Injection
- Easily adaptable to existing facilities.
- Low cost of operation and maintenance


- **Features**

- Pulsating bubble generator system to improve mass transfer in the double layer
- Control Bubbles Size
- High reliability of operation High reliability of operation.

exmajet[®]

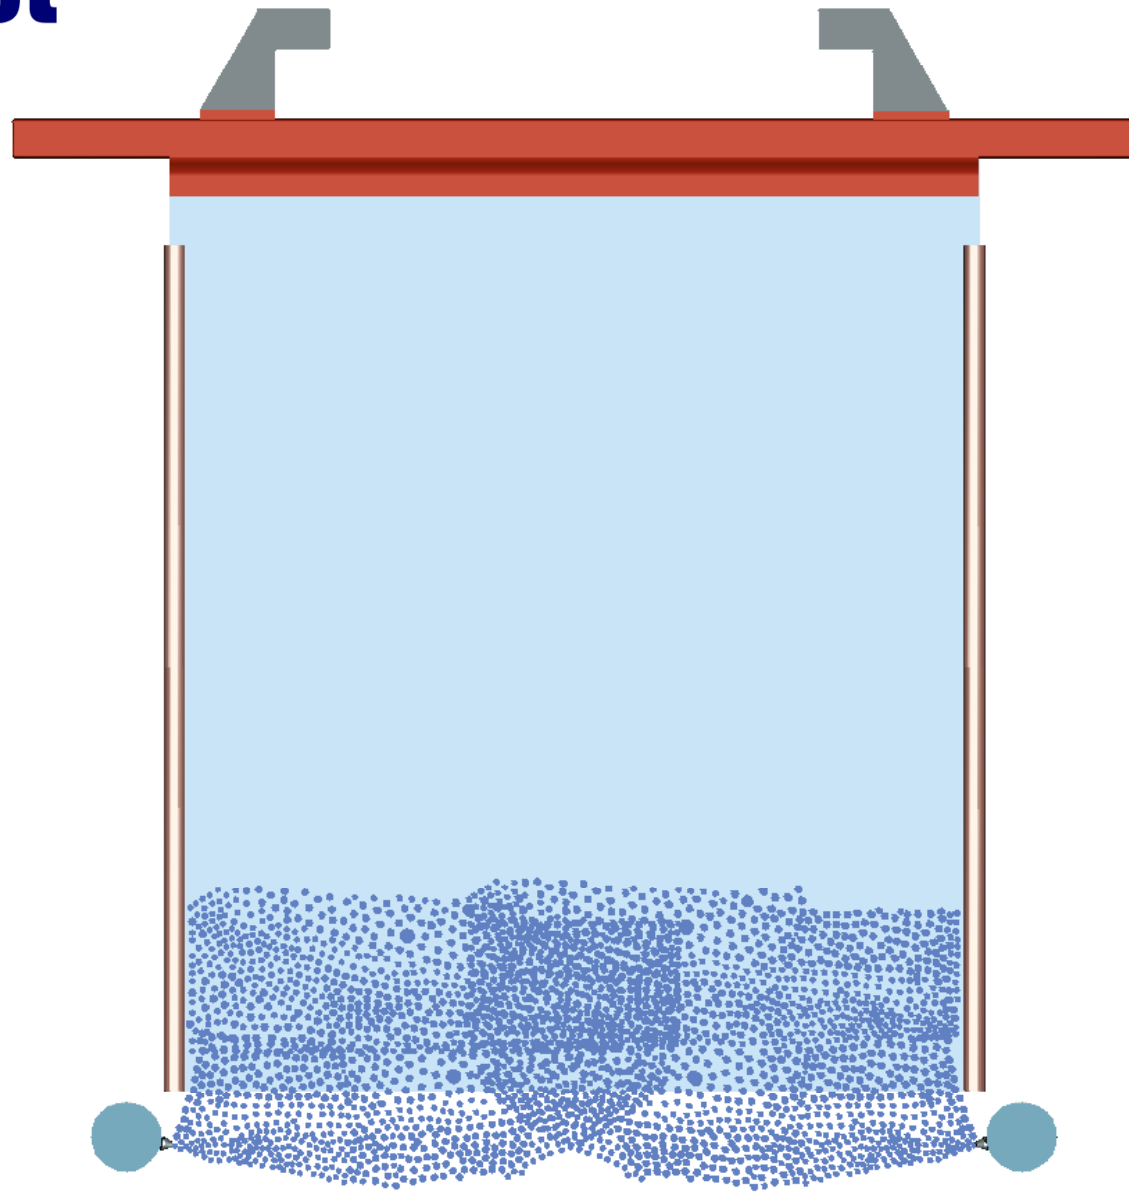

exmajet[®]

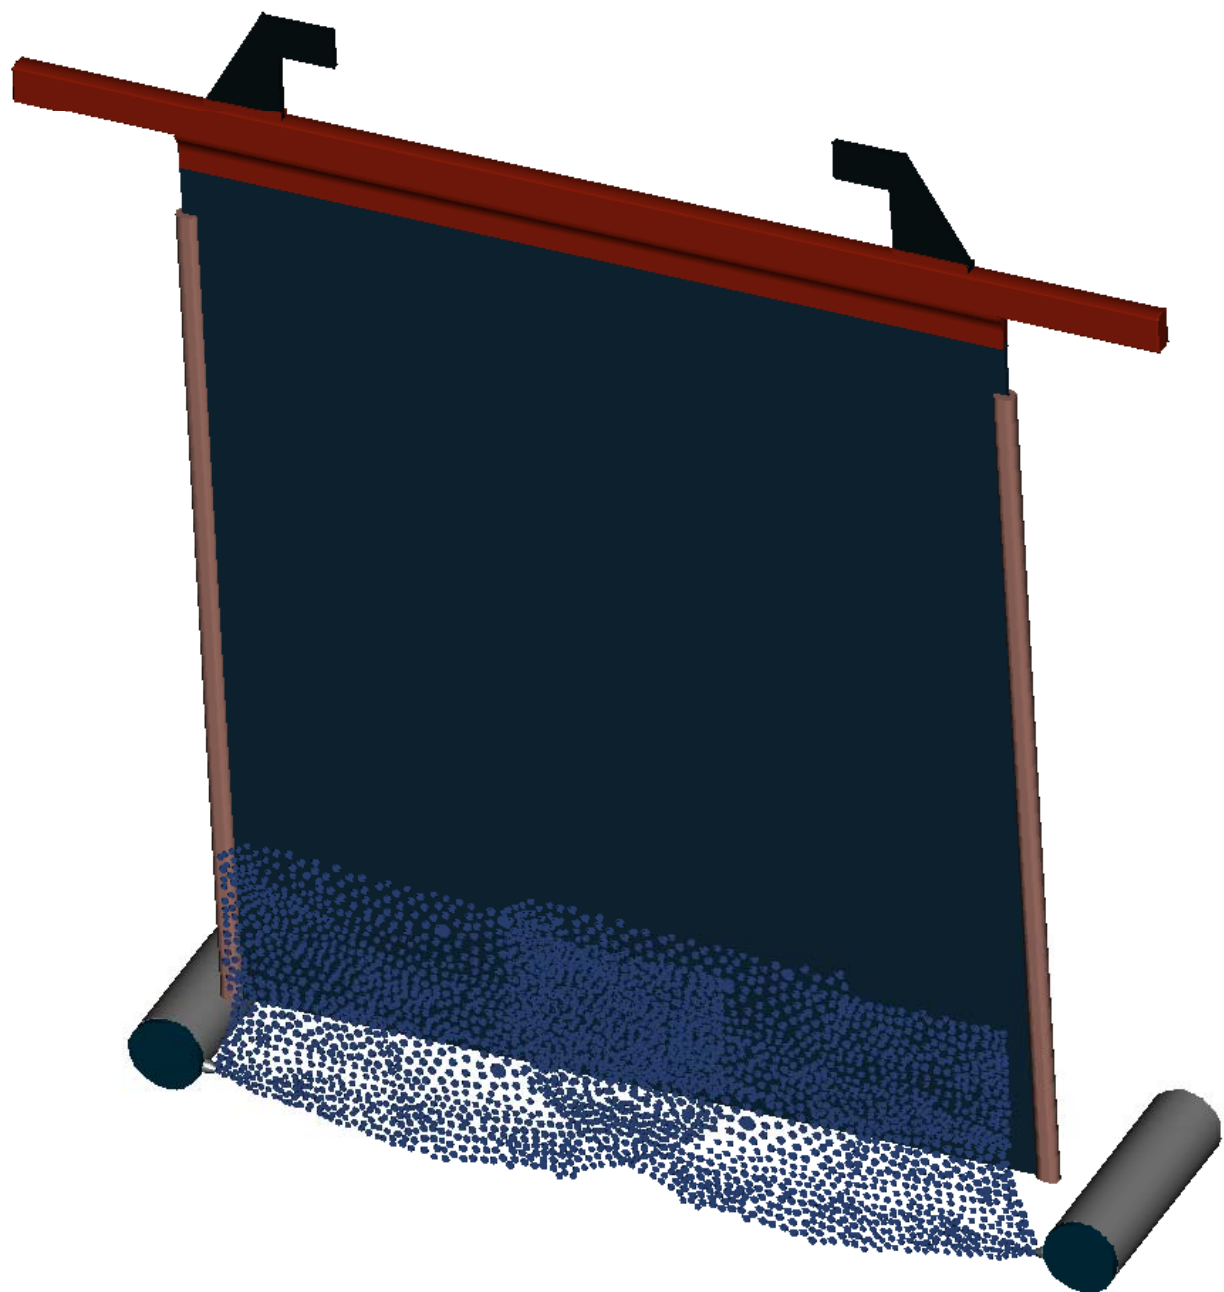


exmajet



exmajet[®]



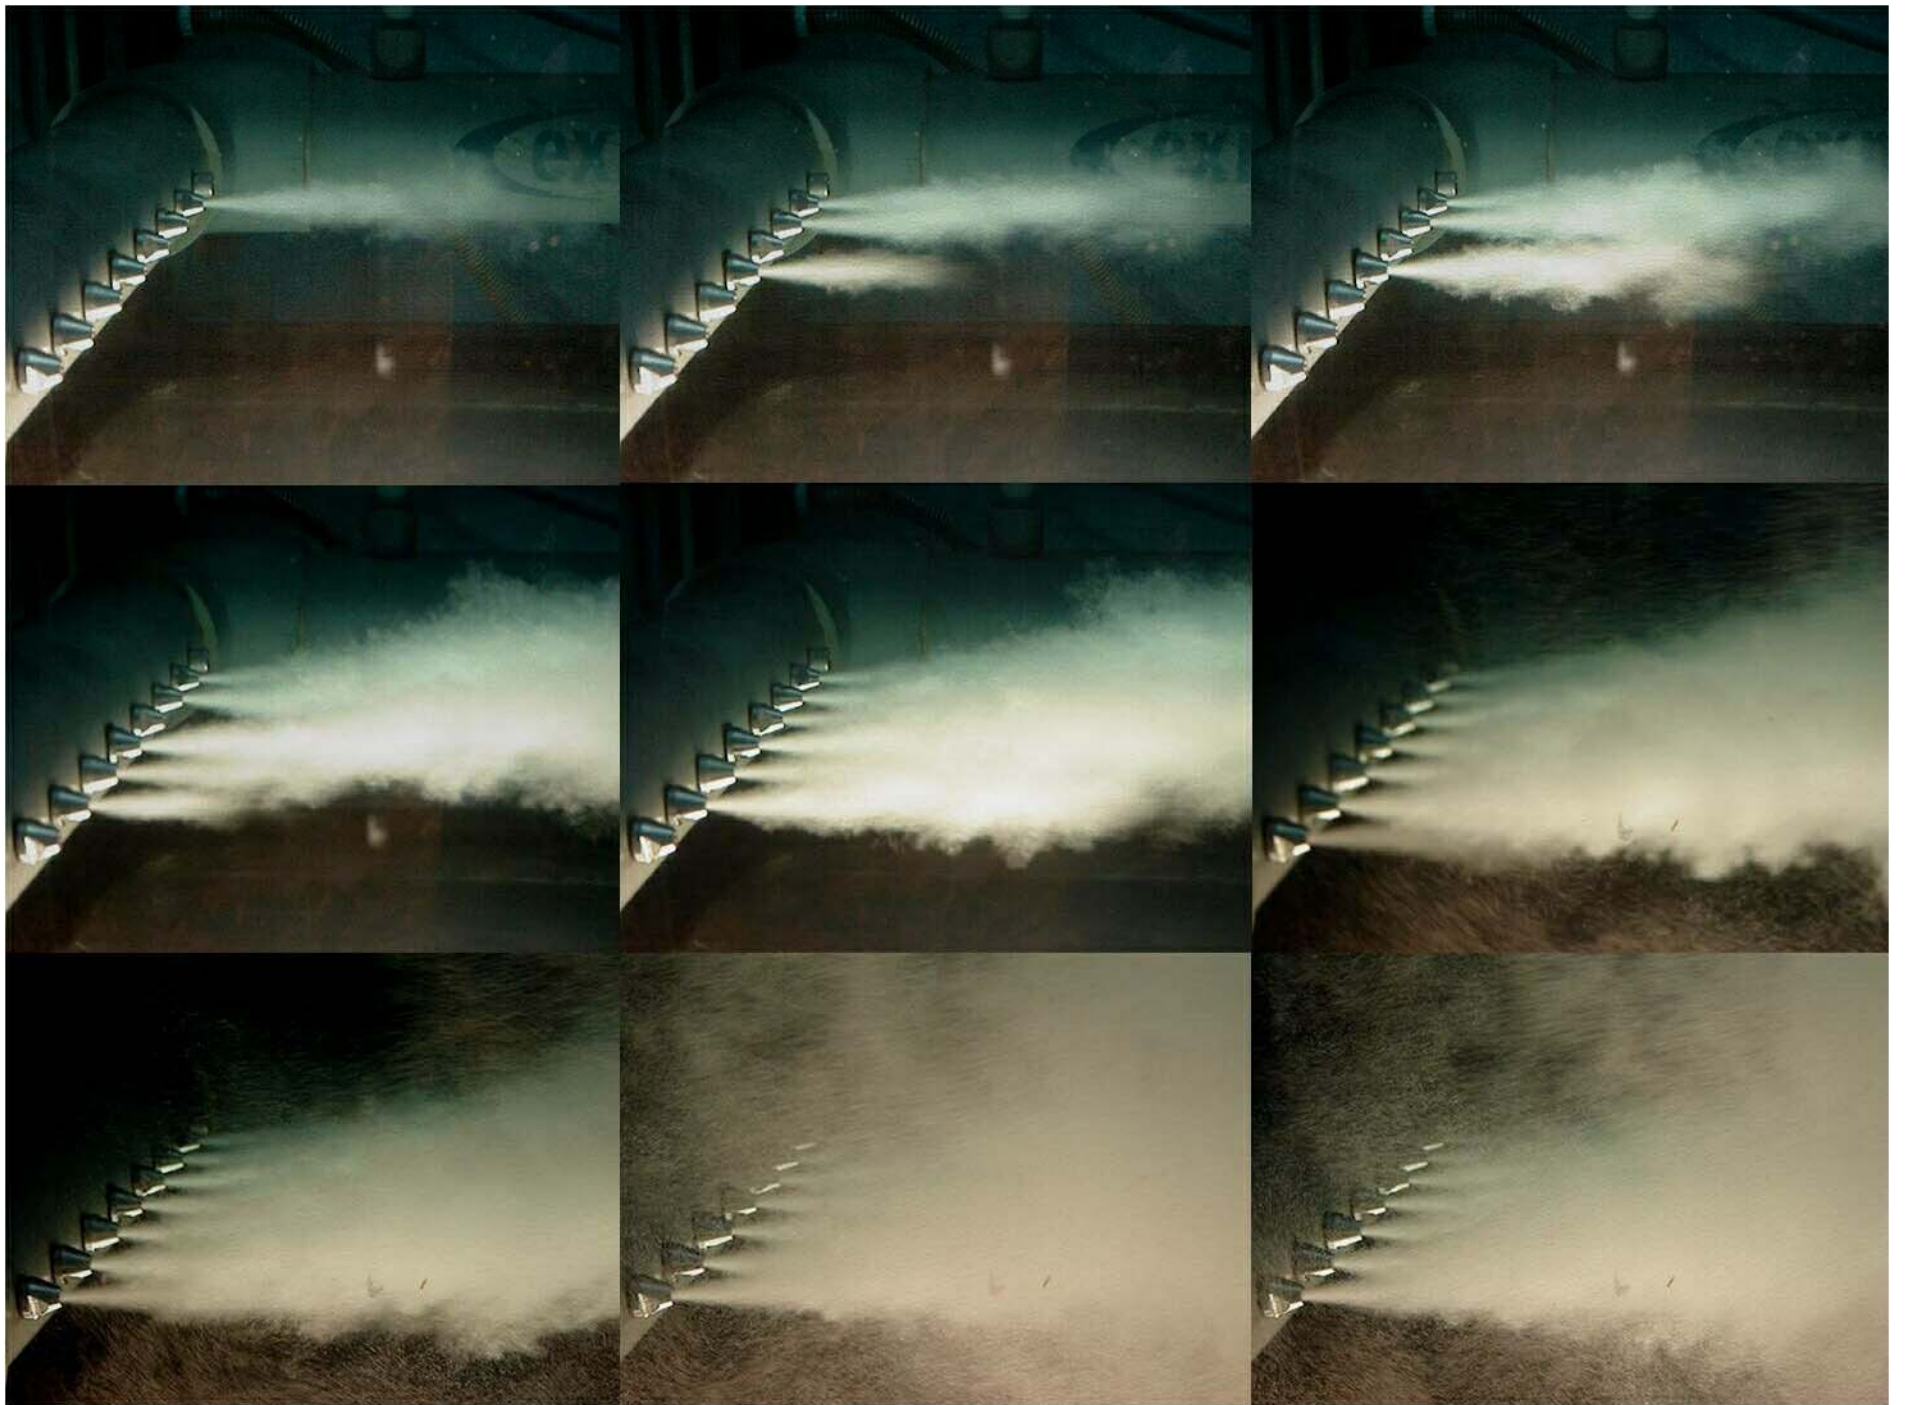

exmajet[®]



exmajet[®]

